



AG-TUF®/AG-TUF UV™

Corrugated PVC Liner Panel



AGRICULTURE



CONSTRUCTION



Overview

Ag-Tuf corrugated PVC liner panel provides efficient cladding for a wide variety of structures. From hog barns to dairy sheds, from poultry houses to fertilizer storage facilities and more, Ag-Tuf and Ag-Tuf UV hold up where other products won't.

Ag-Tuf's resistance to chemicals allows for frequent cleaning and sanitary maintenance, as well as extended service in harsh chemical environments.

Ag-Tuf panels are extremely easy to install and maintain using ordinary tools, while preserving its attractive glossy appearance over a long period of time.

NIFFTONE.COM

Main Benefits

- Surface easy to clean/sanitize
- Excellent chemical resistance
- Resists emitted gasses in animal breeding areas
- Rust-proof and easy to maintain
- Excellent light reflectance
- Attractive high-gloss white finish
- Resists marking and scratching
- Non-flammable
- Ag-Tuf UV for corrosive environments and outdoor applications
- USDA/FDA Compliant
- 10-Year limited warranty for Ag-Tuf, 5-Year limited warranty for Ag-Tuf UV



Typical Applications

- | | |
|------------------------------------|----------------------|
| ■ Poultry Farms | ■ Meat Packing |
| ■ Fish Farms | ■ Fertilizer Storage |
| ■ Pig Farms | ■ Workshops |
| ■ Dairies | ■ Kennels |
| ■ Loafing Sheds | ■ Marinas |
| ■ Factories & Industrial Buildings | ■ Car & Truck Washes |
| ■ Barns | ■ Salt Storage |
| ■ Food Processing | |




Product Availability


Standard Stock	AG-TUF	AG-TUF 9	AG-TUF UV
Panel Width	38"	38"	38"
Panel Length(s)	10'2", 12'2", 14'2", 16'4", 20'4"	12'2", 20'4"	12'2", 16'4", 20'4"
Thickness	0.032 in.	0.032 in.	0.039 in.
Standard Color	Bright White	Bright White	Bright White

Profiles


AG-Tuf
Square Wave




AG-Tuf 9 &
AG-Tuf UV"
Profile
(formerly Ag-Tuf Plus)

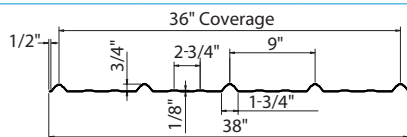


Ag-Tuf Available Trim Profiles



Ag-Tuf Base Trim



Ag-Tuf J-Channel



Ag-Tuf Inside Corner



Special Orders are Also Available*

Width:	From 26" to 47.9"
Length:	Up to 242"
Thickness:	Up to 0.051"
Colors:	Dark Grey
Custom Profiles:	Available with minimum order requirements

* Special Orders available, but subject to surcharge and/or minimum order requirements.

Flammability

Standard	Classification*
ASTM D635-74	CC1
ASTM E84-01	Class A
CAN/ULC S102.2-07	Flame Spread <25 Smoke Developed <450

* May not apply to all thicknesses

Limited Warranty

Ag-Tuf carries a 10-Year Manufacturer's Limited Warranty, Ag-Tuf UV carries a 5-Year Limited Warranty. For warranty details, contact Palram, or visit www.palram.com/us/agtuf

10274 W 600 South
Mentone, IN 46539
574-353-7701
Fax: 574-353-7183



Inasmuch as Palram Americas has no control over the use (and/or installation method) to which others may put this material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make their own test to determine the suitability of the material for their own particular use. In the event of a warranty claim for product failure, Palram Americas reserves the right to inspect any or all of the sheets involved and the installation site itself while the sheets are still in their original position and have not been removed or moved or altered in any way.

© 2022 Palram Americas

