

Matte Black

Smoke

Slate Gray

Ash

Brite



Choose CentralGuard for the best protection and a lifetime warranty.

# Architectural Color Selection Tool



24 GAUGE FLUROPON® 70% PVDF



Evergreen



Autumn

FEVE Color



Dark Bronze




Bronze



Terratone



Tudor




Sand



Galvalume®†

Clear acrylic coating

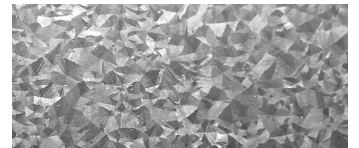

10274 W 600 South  
Mentone, IN 46539  
574-353-7701  
Fax: 574-353-7183



NIFFTONE.COM

SHERWIN-WILLIAMS  
Coil Coatings

† Weathering and appearance variation, including color, sheen, and spangle, is common in non-painted materials and is not a cause for rejection. For consistent appearance, choose a paint-finished product. Colors on this chart are close representations of actual metal color, limited by printing and viewing conditions. Color matching optimized for outdoor viewing.

# Choose an energy efficient paint finish.

Solar Reflectivity is the metal panel's ability to reflect sunlight. This characteristic of metal roofing is the most important in terms of energy savings. Cool metal roofing reflects much of the sun's rays, making the surface of the metal much cooler than material with a lower solar reflectivity rating.


Emissivity is the metal panel's ability to release absorbed heat. A low emissivity rating means the material will be hot to the touch (it doesn't release the heat), while material with a higher emissivity rating will be cooler to the touch. Therefore, metal with a low emissivity rating retains heat and may be more desirable for a cooler climate, while a high emissivity rating reflects heat and is more effective for saving energy in a warmer climate.

COLOR	INITIAL SOLAR REFLECTIVITY	INITIAL EMISSIVITY	SRI VALUE
Ash	0.32	0.84	32
Autumn	0.26	0.84	24
Brite	0.65	0.85	78
Bronze	0.27	0.86	26
Dark Bronze	0.27	0.85	26
Evergreen	0.26	0.84	24
Galvalume® (Acrylic Coated)	0.69	0.19	62
Sand	0.48	0.86	54
Slate Gray	0.18	0.88	15
Smoke	0.32	0.85	32
Terratone	0.32	0.87	33
Tudor	0.26	0.86	32
Matte Black	0.26	0.85	24


Solar reflectance values are determined by means of a solar spectrum reflectometer in accordance with ASTM C 1549. Thermal emittance values are determined in accordance with ASTM C 1371. SRI is calculated in accordance to ASTM E 1980 with medium wind speed. Panels are unwashed. The Sherwin-Williams company certifies these tests to be true and accurate and performed by their laboratory.

For information on energy savings, visit [www.centralstatesmfg.com/energy-savings](http://www.centralstatesmfg.com/energy-savings)

## Central-Loc® - 3" Snap-lock Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'

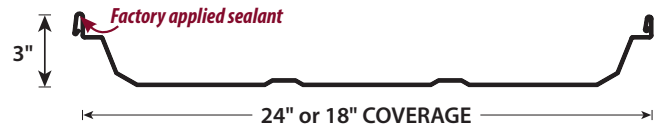

## Central Seam Plus® - 3" Mechanically Seamed Structural Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'

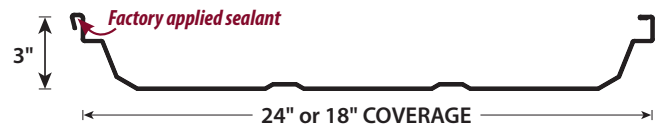

## Central Span™ - 2" Mechanically Seamed Structural Recommended minimum pitch - 1/4:12 | Purlin spacing - 5'



## Central Snap® - 1 3/4" Snap-lock Recommended min. pitch - 1:12 | Non-structural panel perfect for light commercial applications.



## Precision-Loc™ - 1" Soffit and Wall Panel Concealed fastener panel with clean lines that complement a building's walls and soffits.



10274 W 600 South  
Mentone, IN 46539  
574-353-7701  
Fax: 574-353-7183

